

SPECIFICATIONS



MOD. 74 Rev.01
Date: 21/04/2021
Page 1 of 2

5HK-305 RETROFIT KIT ORONA


DESCRIPTION

Retrofit kit Orona.

It allows to:

- connect the autodialer to the ARCA III board
- power the autodialer at 24 Vdc

IMAGE

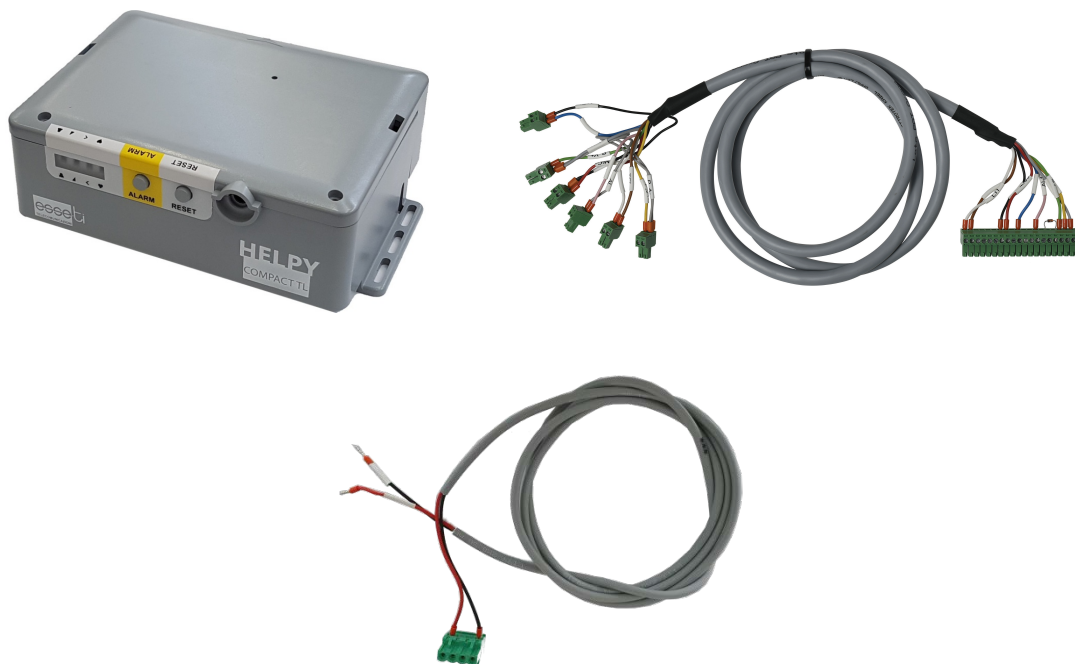

COMPONENTS

Helpy Compact-TL 10-30 V (5HL-660)

Orona cable for ARCA III (6CV-30035)

24 V Orona power supply cable (6CV-30040)

SPECIFICATIONS



MOD. 74 Rev.01
Date: 21/04/2021
Page 2 of 2

5HK-305 RETROFIT KIT ORONA

ORONA CABLE FOR ARCA III (6CV-30035)

Cable 9 x 0,50 (shield and preinsulated terminals): 1,7 m

20-way terminal blocks (complete with diode 1N4148) compatible with the following Helpy autodiallers models: [Helpy 2W](#), [Helpy Compact-TL](#), [Helpy Quick-TL](#), [HelpyGSM](#), [HelpyGSM-RM](#)

7 x two-way connector: to [Orona ARCA III board](#)

20-way terminal blocks		Orona connectors	
LTI		TEL	J15
LTI		TEL	
ALT2		ALT+	J17
–		ALT-	
		MIC –	
MIC3		MIC +	
AL1		AL	J11
–(*)		AL	
–(*)		OV	J13
AR		P_V+	J9
–(*)		P_V-	
		P_A-	
AI		P_A+	

24 V ORONA POWER SUPPLY CABLE (6CV-30040)

Cable 2 x 0,50 (preinsulated terminals): 1,65 m

Four-way connector: to [Orona PDCC board](#)

Wires		Orona connector	
+	red	24	J6
–	black	0	