

# SPECIFICATIONS




MOD. 74 Rev.01  
Date: 17/02/2021  
Page 1 di 3

## 5CT-061 GSM500 GC

### DESCRIPTION

GSM gateway with built-in backup batteries

### IMAGE

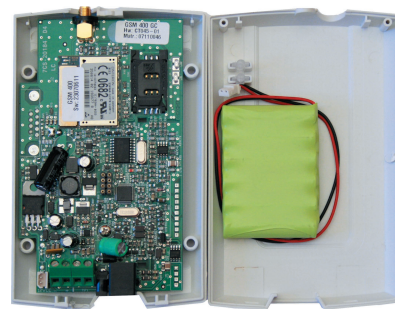

### FUNCTIONS

- Voice calls
- DTMF local programming
- SMS remote programming
- Caller number display service
- CLIP / CLIR
- Roaming service management
- Battery check (low/dead/replaced battery notification via SMS)
- External power failure control (failure/restore notification via SMS)
- Signal level check via local telephone or via SMS
- Automatic converter of selected telephone number
- Programmable telephone line voltage
- Adjustable reception and transmission levels
- Customizable timeout of post dialing
- Automatic country setting

# SPECIFICATIONS



MOD. 74 Rev.01  
Date: 17/02/2021  
Page 2 di 3

## 5CT-061 GSM500 GC

Automatic reboot under prolonged GSM signal absence

Remote reboot

Firmware update OTA (via GPRS)

### TECHNICAL FEATURES

GSM/GPRS module: QUAD-BAND

Transmission power: 1 W at 1800/1900 MHz, 2 W at 850/900 MHz

GSM signal indicator LED: green

GSM signal indicator flash: 1, 2, 3 or 4 for low, medium, good, high signal level

Status indicator LED: red

Line status indicator LED (FXS output: clear, engaged, ring): white

Power supply status indicator LED: blue

SIM card slot: 2FF, built-in

Telephone line connection: terminal block or connector RJ-11

Antenna connector: SMA/f

Antenna: magnetic base antenna with cable (2 m) and SMA/m connector

### POWER SUPPLY

Power supply: from 10 V to 17V (dc)

Power supply input: terminal block 12 Vdc / input for 230 Vac external adapter

Back up battery: NiMH 800 mAh 7,2 V

Expected operation time with a new battery in idle state: 8 hours

Expected operation time with a new battery in conversation state: 2 hours

# SPECIFICATIONS



MOD. 74 Rev.01  
Date: 17/02/2021  
Page 3 di 3

## 5CT-061 GSM500 GC

### ABSORPTIONS

Power supply	10 Vdc	12 Vdc	13,8 Vdc	10 Vdc	12 Vdc	13,8 Vdc
	(back up battery not connected)			(back up battery connected)		
Telephone handset hung up	30 mA	30 mA	25 mA	40 mA	60 mA	50 mA
Telephone handset lifted	90 mA	80 mA	70 mA	100 mA	105 mA	90 mA
Conversation	130 mA	115 mA	110 mA	140 mA	135 mA	130 mA

### OTHER DATA

Dimensions (antenna not included): 140x96x28 mm

Weight: 210 g

Ingress Protection Code: IP30

Operating temperature: -10 °C to +60 °C

Relative humidity: 20% to 80%

### COMES WITH

GSM500 GC

Antenna: magnetic base antenna with cable (2 m)

External adapter: 230 Vac 50 Hz / 12 Vdc 500 mA

Telephone connection cable: 2 m

Screws

User manual